



LOW COST MOBILE MAPPING SYSTEM FOR URBAN SURVEYS

Sérgio MADEIRA², José GONÇALVES¹ and Luísa BASTOS¹

¹ Faculty of Science – University of Porto, Portugal

² University of Trás-os-Montes e Alto Douro, Portugal

Abstract: This article describes a low cost terrestrial Mobile Mapping System (MMS), developed at the University of Porto, that can be used in a wide range of urban GIS data acquisition (like traffic signs, infrastructures inventory, publicity, road marks, etc.), as well as in highway or railway inventory. It incorporates a direct georeferencing system with a single frequency GPS receiver board and two progressive CCD colour video cameras with 640x480 resolution as remote sensors. The image acquisition system works independently so it can be used with any direct georeferencing system. The system allows for the association of a position and attitude to each digital frame captured by the video cameras. Several calibration steps have to be overcome before the system is prepared to do the survey operations, namely camera calibration, relative orientation between cameras and determination of rotation and coordinate offset between vehicle and cameras reference frames. Procedures were developed in order to guarantee the perfect synchronization between direct georeferencing data and image data. A user friendly software tool was created to allow for an easy object coordinate extraction either in auto mode, where the conjugate coordinates are obtained using image correlation techniques, or in manual mode. Tools for efficient integration with previously existent databases and communication with other GIS platforms were developed as well. Several surveying experiments are described in the paper. The videogrammetry system implemented is a low cost system that can achieve accuracy, in relative positioning, of a few decimetres. The overall accuracy depends mainly on the direct georeferencing system used.

1. INTRODUCTION

The main purpose in developing this terrestrial MMS was to build a system adapted to urban environment, using low cost equipment and to keep in an acceptable level the overall complexity in surveying procedures and system calibration. With those objectives in mind it was decided to use an up to date current consumer laptop, two CCD progressive colour video cameras with 640x480 resolution, a low cost direct georeferencing system based on a single frequency DGPS receiver and car odometer and to implement simple, yet effective, system calibration procedures.



Figure 2 - Surveying vehicle and system components.

The relative positions of the system components remains unchanged during surveying, and the corresponding parameters are settled accurately in a previous step. Of major importance is the determination of the camera orientations in the vehicle reference frame and the relative orientation between the cameras themselves, in the case that two are used.

3. SYSTEM CALIBRATION PROCEDURES

The correct term to apply to the calibration of an MMS is *system calibration* because it implies some calibration procedures that are interrelated. Camera lens calibration, relative orientation between cameras, relative orientation between platform and cameras and time synchronisation between the acquired data, are all aspects that take a roll in the quality of the achieved results.

In order to implement the photogrammetric procedures the photogrammetric procedures the collinearity model is used (Wolf, 2000) Calibration procedures were thought following the principle, previously stated, of implementing a low cost and simple to use system. These procedures must be possible to do by a normal operator in the context of a normal system use.

3.1. Camera calibration

The characteristics and behaviour of the video sensors are vital for the overall system performance, especially the robustness of the lenses and the need to keep the inherent distortion factors at low levels. In one hand the lens system must offer the possibility of iris and focal length fixing in order to keep the internal characteristics practically unchanged, at least during a surveying session, and the internal characteristics itself must be determined by means of parameter estimation. To achieve this last requirement it is necessary to apply a self-calibration technique (Fraser, 1997) to determine the calibration parameters of the video camera lenses. These interior orientation parameters include the lens focal distance, principal point location and others used to model lens distortions. Several tests were carried out in order to determine what interior orientation parameters should be used. A distortion model of one of the cameras is shown in Figure 3, with a scale factor of 30.

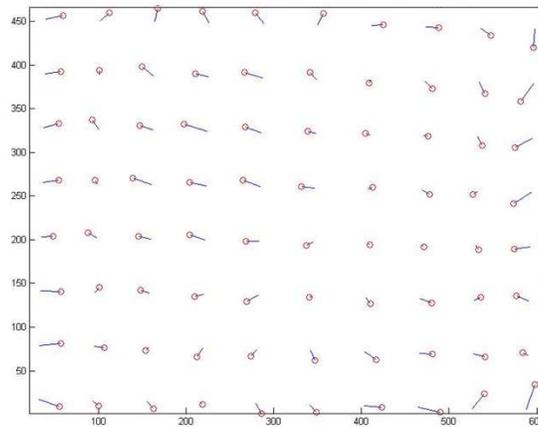


Figure 3 - Distortion model of camera 1.

After statistical and visual analysis of the results, it was concluded that the best parameters to use were the principal point coordinates, focal length and, additionally, a z coordinate scale factor (λ in equation 1, that accounts for not square pixels) 2 radial and 2 decentering deformation parameters. This leads to the following correction parameters in the collinearity model (1), with the inclusion of the radial distortion parameters, k_1 and k_2 , and the decentering distortion parameters, p_1 and p_2 :

$$\begin{cases} \Delta x = (x - x_0)(k_1 r^2 + k_2 r^4) + P_1(r^2 + 2x^2) + 2P_2 xz \\ \Delta z = (z - z_0)(k_1 r^2 + k_2 r^4) + 2P_1 xz + P_2(r^2 + 2z^2) \end{cases} \quad (1)$$

where x, z = measured image coordinates

x_0, z_0 = image coordinates of the principal point

$\Delta x, \Delta z$ = corrections due to lens distortions

$$r = \sqrt{(x - x_0)^2 + (z - z_0)^2}$$

For each camera several images must be obtained of an object with well defined points measured in a true-size object reference system. These can lie in a plane like in the present case, (Figure 4). The pattern used was obtained from a well known photogrammetric software, Photomodeler, but the software itself wasn't used.

Camera calibration is performed independently for each camera. The initial approximations for the exterior parameters, 3 rotations and 3 translations for each image, in the object reference frame, are obtained with a process that relies on the collinearity equation itself; otherwise there are no required initial approximations, except for the focal distance. The final calibration parameters are obtained from an iterative process using a bundle adjustment.



Figure 4 - Image acquisition to obtain calibration parameters of the video camera lenses.

3.2. Relative orientation between cameras

Object coordinates are first calculated in the camera reference frame, whose axis coincides with left camera axis. This process relies on rigorous determination of position and attitude of the right camera relatively to the left. The relative orientation parameters are 3 rotation angles (ω , φ and κ) and 3 translation distances (T_x , T_y and T_z). Its determination is performed within the developed software. Due to small base vector between cameras ($B=1.045$ m) some instability was experimented mainly in the rotation angle between z axis, which defines the heading angle (κ), largely affecting the Y coordinate of calculated positions. To overcome this situation a control distance was introduced in the relative orientation process, which consists in measuring a distance between left camera origin and a point used in the relative orientation, including it as a constraint in the least squares adjustment. This procedure has showed itself quite effective, allowing for a much more correct determination of orientation parameters, with consequent benefit in correct coordinate calculation.

3.3. Relative orientation between vehicle and cameras reference frame

In order to obtain the relative orientation parameters between vehicle and cameras reference frames it is necessary first to define vehicle reference frame. It is a reference system whose origin coincides with phase centre of the GPS antenna and its orientation coincides with vehicle orientation: Y axis frontward and Z axis upward. The relative orientation between vehicle and cameras reference frames are 3 linear offsets, along the X , Y and Z axis of the vehicle reference frame and 3 rotations for each axis, called angular offsets. Figure 5 shows a top view of the cameras and vehicle reference frames.

The linear offsets of the cameras in the vehicle reference frame needs to be measured only once because the system components occupy predefined places in the vehicle. Therefore a very careful measurement of the components relative positions is made using standard tape. It is not necessary to use a high level precision measurement, such as a total station, because this error, expected at centimetre level, remains as a constant shift in calculated coordinates. This step will never be needed again, as far as the same vehicle is used.

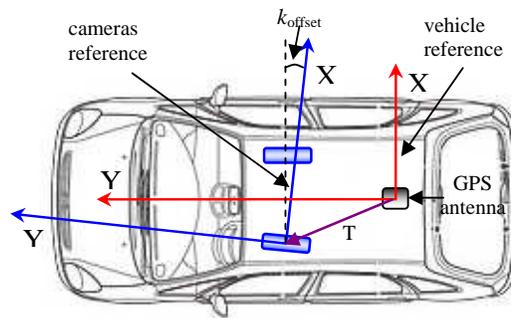


Figure 5 - Cameras and vehicle reference frame.

The angular offsets of the cameras relative to the vehicle reference frame is a more delicate question. First, the errors made in its measurements largely affect the errors in coordinate calculation, growing its influence with distance, and secondly there isn't an explicit method for its determination. Furthermore they change each time the system components are mounted.

The simplest way to obtain the angular offsets is to link its determination to the relative orientation between cameras. Once the cameras are put in a line perpendicular to the Y axis of vehicle reference the searched angle offsets will come as a function of the base vector components between cameras:

$$\varphi_{offset} = \arcsin \frac{T_z}{B}, \quad \varphi_{offset} \in \left[-\frac{\pi}{2}, \frac{\pi}{2} \right] \quad (2)$$

$$k_{offset} = \arcsin \frac{T_y}{-\cos \varphi \cdot B}, \quad k_{offset} \in \left[-\frac{\pi}{2}, \frac{\pi}{2} \right] \quad (3)$$

where B is the length of the base vector between cameras.

Unfortunately it is not possible to find the ω_{offset} angle (rotation of X cameras axis) using this process. Once the cameras are put levelled over the vehicle it is considered that the most important offset angle to obtain is κ_{offset} (rotation of Z cameras axis) due to its influence in calculated object X,Y coordinates. The ω_{offset} angle mainly relates with height determination, which is not very important in the acquisition of coordinates for GIS data input. However, a good practice that we try to follow is to put the left camera as levelled as possible and to consider the referred offset angle as zero, so minimizing its influence in calculated coordinates.

3.4. Frame synchronisation with GPS time

The cameras are connected to the laptop through a firewire port and the images are stored in JPEG format using the software provided with the cameras. It is necessary to put a precise time tag to each acquired image, in order to precisely discriminate their position and attitude in the absolute reference system. It was decided to use the external trigger possibility offered by the cameras in conjunction with the frequency generated by the GPS CAM-SYNC which is, as described before, synchronized with the GPS PPS. In this way, the perfect simultaneity

of the frames acquired by both cameras and its accurate synchronisation with GPS time is guaranteed. The time precision of the PPS is about 50 nanoseconds and the same is expected for the acquired frames.

However, to correctly time tagging the images, the system time of the logging computer itself must be synchronised with GPS time, although with not so great accuracy. The chosen procedure was to use the same receiver that is triggering the cameras to synchronise the laptop with NMEA time messages through a RS232 connection port, using current commercial software. This kind of laptop time synchronization typically leads to a 0.01 seconds of clock accuracy in the laptop.

To improve the correct time tagging of the acquired frames it was decided that the frequency generated by the GPS CAM-SYNC will miss the pulse corresponding to the integer second. In this way, when plotted the positions, bigger steps will be identifiable in the missed positions, which correspond to the integer seconds. During surveys the chosen frequency was, in most times, 5 frames per second (FPS) what leads to a separation time between frames of 0.2 seconds collected at 0.2, 0.4, 0.6 and 0.8 parts of each second. Figure 6 represents the architecture image acquisition.

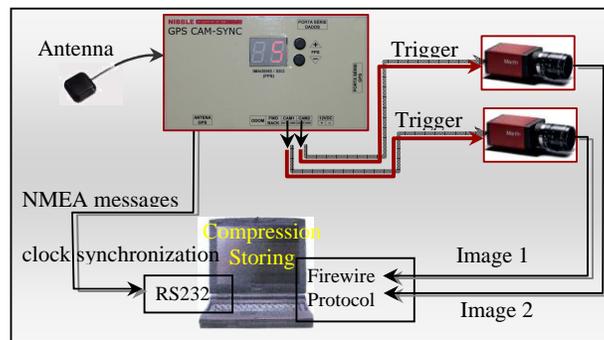


Figure 6 - Image acquisition architecture.

It is important to notice that the image time stamping is not performed by the laptop. Its role is only to help the discrimination of which second belongs to the frames once the fractional part is already known. For this reason a laptop clock accuracy better than 0.5 seconds will suffice, even so the accuracy of clock used is far better than that. The time stamping work is performed in post-processing with a software module developed for that purpose.

4. MOBIL - SOFTWARE APPLICATION MODULE

A software application, named MOBIL, was developed in order to take full advantage of the data provided by the MMS system (see Figure 7). It integrates the data coming from the videogrammetry system and from the direct georeferencing system. The layout window allows for the full control of the cameras frame pairs in video mode. It is possible to perform, with this application, the calibration of the system and to obtain coordinates of conjugate points. This can be done in manual or auto mode, in which case the software uses stereo-correlation techniques. The use of object measuring tools, either surface areas or linear lengths, is also possible, in which case no direct georeferencing data is required. This can be of interest when the main goal is the extraction of geometrical information from the images.

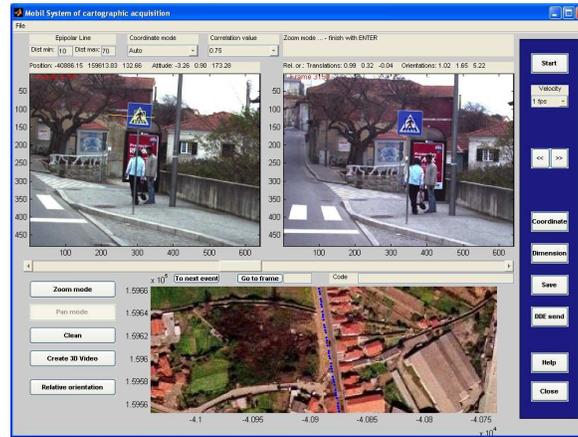


Figure 7 - A layout window of Mobil program.

Some useful tasks were added to the software in order to make the video survey as effective and comfortable as possible.

- The Mobil program is able to detect if an object was previously surveyed, giving a warning message.
- An events file can be fulfilled during data acquisition and, if required, the program will jump between the events.
- A georeferenced image or vector GIS data can be drawn below the plotted trajectory and measured points in order to perform quality control.
- Measured data can be directly sent to cartography in dwg format.

5. TESTS AND RESULTS

The system is under use for several months since it has almost reached its final stage. Several data sets have been tested. It could be verified that the system is very well suited to perform quick surveys of urban areas in order to fully map the streets, or simply to detect changes in objects comparatively to any existing older database or since last survey. The collected images are of great importance once they allow fulfilling qualitative variables in the databases, related with urban equipment (traffic signs, light poles, road marks, etc). Changes in the qualitative variables can be easily detected with tools implemented in the software, which are referred in the previous point.

We have also evaluated the performance of the system for both relative and absolute object measurements. In this case the errors come from the quality of the navigation and mapping sensors, but also from the pre-determined relative orientation, offset parameters and matching process.

5.1. Test with relative coordinates

In order to assess the capability of the system in measuring coordinates of object points, the system was mounted on a stopped vehicle in front of a building façade (Figure 8). Points on this façade were surveyed with a total station, as well as the camera positions. The process

was done from three locations of the vehicle. The relative orientation parameters between cameras were obtained with one of the videogrametric pairs.



Figure 8 - Total station survey for tests in relative coordinates and distances

To carry out this test 32 points of known coordinates in the building and its environment were measured with the system in all of its positions. Differences to the known coordinates were calculated and are presented in Figure 9. The statistical analysis (mean and RMS error) are presented in table 1. A division was made between distances less and above 30 meters. At this point it was observed that the errors introduced by the calibration processes and by the image point conjugate determination are very well self contained, leading to errors in measured coordinates, in general smaller than 30 cm at distances of about 30 meters or inferior. For distances between 30 and 50 meters the errors increase but are in general less than one meter.

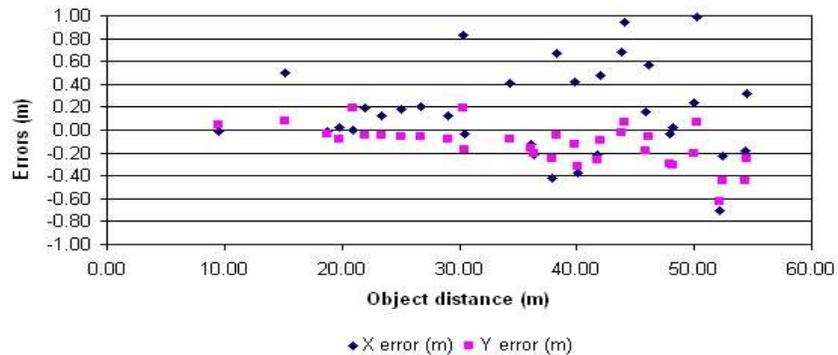


Figure 9 - Errors in measured total station coordinates with distances to objects in meters.

	Distances < 30 m		Distances > 30 m	
	X error	Y error	X error	Y error
Mean	0.13 m	-0.01 m	0.18 m	-0.18 m
RMS	0.20 m	0.08 m	0.49 m	0.26 m

Table 1- Mean and RMS error in object coordinates of the 32 points measured with total station

5.2. Test with absolute coordinates

In the previous tests the errors introduced by the direct georeferencing system weren't present. This third test will account for those errors. Twenty traffic signs distributed in urban and near urban areas, were surveyed with GPS differential static methods (example of a surveyed sign is shown in Figure 7). The accuracy of these measurements is expected at centimetre level. With the developed MMS system mounted on a vehicle this traffic signs were surveyed, in motion along the roads. Differences to the GPS coordinates were calculated and are presented in table 2, together with mean, standard deviation and RMSE.

Traffic sign	X error (m)	Y error (m)	Linear error (m)	Object distance (m)
1	0.27	0.56	0.62	10.27
2	0.53	-0.87	1.02	37.47
3	-0.74	-1.23	1.44	13.87
4	1.68	-0.70	1.82	10.84
5	-1.95	-1.26	2.32	10.57
6	-1.21	-1.69	2.08	9.77
7	-1.29	-3.44	3.67	5.42
8	0.10	-3.02	3.02	9.51
9	-0.05	-2.58	2.58	9.47
10	-1.68	-3.01	3.45	16.87
11	0.70	0.70	0.99	10.95
12	1.26	-0.13	1.27	43.80
13	2.03	-1.92	2.79	25.69
14	-0.71	0.69	0.99	12.71
15	1.06	-1.14	1.56	15.09
16	-1.74	-1.37	2.21	14.32
17	0.52	-4.03	4.07	33.17
18	-3.38	-1.85	3.85	16.57
19	1.13	-1.29	1.71	32.46
20	-0.13	-1.92	1.92	34.03
Mean	-0.18	-1.48	2.17	---
StDev	1.39	1.33	---	---
RMS	1.37	1.96	2.39	---

Table 2 - Errors obtained in absolute coordinates of traffic signs

The positioning method of the direct georeferencing system used only pseudo-ranges and EGNOS corrections. The expected accuracy agrees with the results obtained, i.e., RMS errors smaller than 2 metres. The errors introduced by the videogrammetry system, as shown before, are of smaller magnitude. The graph of Figure 10 shows the X, Y and linear errors against the distance to the coordinated point. It can be observed that there isn't an evident connection between errors and distances to the coordinated objects. It is clear to the authors that the errors introduced by the direct georeferencing system, actually the data from the GPS CAM-SYNC box, are contributing with the larger portion of the final errors in coordinates and masking the smaller errors introduced by the cameras system, which increases with the distance.

The mean of the Y error is high, appearing to indicate some systematic error that couldn't be identified once the survey trajectories, when measuring object coordinates to this experiment, occurred practically in all directions. So it can't be a shift in the measured distance or in κ attitude angle.

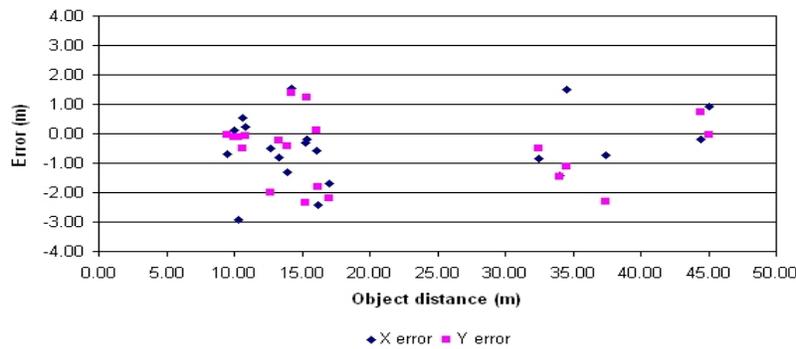


Figure 10 - Errors in measured absolute coordinates with distances to objects in meters.

6. CONCLUSIONS

Building a simple, low cost and efficient Mobile Mapping System for urban survey relates a set of inter-dependending aspects that must be resolved in order to achieve a final acceptable stage according to the goals previously defined. Our main goal was to keep in simple level the technical and equipment demands, while being rigorous and trying to achieve good quality standards in the final results.

The presented method for relative orientation between vehicle and cameras reference frame tries to avoid complicated schemes for each survey, linking it to the process of relative orientation between the cameras. Mathematically the method is sustainable but questions may be put relatively to the high dependency of offset angles with the linear translations computed during the relative orientation. However no systematic angular shift could be detected in the several tests that could be attributed to bad angle offsets determination.

The authors consider that the camera frames synchronisation problem was satisfactorily resolved once the captured frames are directly ordered by a GPS receiver using an external trigger. In this way two important issues in MMS surveys could be overcome. First the simultaneity of acquired frames by both cameras, and secondly the correct discrimination of



the GPS acquisition time with an accuracy better than milliseconds. So, the synchronisation of acquired frames with GPS time is almost perfectly achieved.

The videogrammetry system contributes to the positional accuracy with an error below 30 cm at distances less than 30 meters and below 1 meter at distances less than 50 meters. The direct georeferencing accuracy is the main bottleneck in the overall accuracy.

The system is very well suited to perform quick surveys of urban areas in order to detect changes in imaged objects, with respect to other surveys of the same area or to an older database. This aspect is strongly supported by several tools implemented in the software developed, that include the indication in the images of previously surveyed objects, or the use of event files that allow to jump directly to predefined events.

Future developments of the current system, keeping the low cost and simplicity standards, include the connection to the car odometer and the incorporation of gyroscope measurements of U-blox GPS unit.

References

- Ellum, C., El-Sheimy, N., 2002. Land-based integrated systems for mapping and GIS applications, *Survey Rev.*, Vol. 36, No. 283, pp. 323-339, London.
- Ellum, C., 2001. The development of a Backpack mobile mapping system, 2001, Thesis for degree of master of science, Calgary, Alberta.
- Fraser, C., 1997. Digital camera self calibration, *ISPRS Journal of Photogrammetry & Remote Sensing*, n°2, pp 149-159.
- Grejner-Brzezinska, A., 2001. Direct Sensor Orientation in Airborne and Land-based Mapping Applications, Report n° 461, Department of Civil and Environmental Engineering and Geodetic Science, Universidade de Ohio
- Wolf, P. R. and Dewitt, B. A., 2000. *Elements of photogrammetry, with applications in GIS*, McGraw-Hill, 3rd Edition, pp. 233-259.
- Zhang, K., Xiao, B. 2003. Current status of low-cost GPS and mobile mapping systems, *Proceedings of the Malaysia Geoinformation and Surveying conference*, Kuching, Malaysia.
- Pratt, W.K. (1978). *Digital Image Processing*. New York: John Wiley and Sons.

Corresponding author contacts

Sérgio Madeira
smadeira@utad.pt
Universidade de Trás-os-Montes e Alto Douro
Portugal